


MULTISPORT SHOT-CLOCKS Readability IIO m

BASKET BALL

FIBA EQUIPMENT S VENUE

SC24 TIMER SUPER PRO 2017

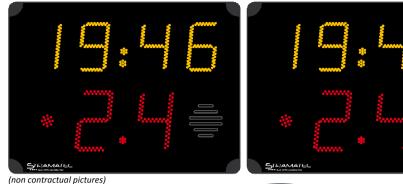



Composition

2x display units 1 control console 1 carrying case for control console 2 mains cable 2x junction boxes and transmission cables Operating and installation instructions

Description (per display unit)

Use:	Indoor
Transmission:	Radio (868 MHz) or cable. Work only with STRAMATEL Multisport scoreboard
Readability:	110m, angle >160°
Dimensions:	840 x 570 x 90mm
Weight:	11 kg
Power supply:	230V / 50-60Hz
Power consumed:	89 VA
Protection:	Unbreakable matt polycarbonate front face (DIN 18032-3)
External Horn:	115dB at 1m
Mains cable (supplied):	2x25 m – Type: 230V, 3G, 0.75 mm²
Cable controlled:	Junction Box + 2 x 25 m transmission cable (scoreboard/junction box)
	Type: DIN/DIN + 25 m transmission cable (junction box/main junction box)
	Type: phone cable 2 pairs 6/10 th

Display functions (per display unit)

Shot-clock: Game clock repeater: 24/14s violation:

2 red LED digits (25 cm) + 1 red point 4 yellow LED digits (16 cm) + blinking points 1 red LED point

Control consoles

1 console: (145 x 150 x 40 mm) with LCD screen with 1 lane of 20 characters (9mm high) Shot-clock controller -WORK ONLY WITH A STRAMATEL ELECTRONIC SCOREBOARD

Options

Led Strip:

Electric light to be installed behind the backboard, connected with the 24 second shot clocks, synchronised with the main timer to light up at the end of each period



SC24 TSP_2017_GB_A